

## Temperature Measurement

### Transmitter for field mounting/field indicator

SITRANS TF - Transmitter, two-wire system and SITRANS TF - Field indicator for 4 to 20 mA

#### Overview



#### Our field devices for heavy industrial use

- HART, Universal
- 4 to 20 mA, universal
- Field indicator for 4 to 20 mA signals

The temperature transmitter SITRANS TF works where others feel uncomfortable.

#### Benefits

- Universal use
  - as transmitter for resistance thermometer, thermocouple element,  $\Omega$  or mV signal
  - as field indicator for any 4 to 20 mA signals
- Local sensing of measured values over digital display
- Rugged two-chamber enclosure in die-cast aluminium or stainless steel
- Degree of protection IP66/67/68
- Test terminals for direct read-out of the output signal without breaking the current loop
- Can be mounted elsewhere if the measuring point
  - is hard to access,
  - is subject to high temperatures,
  - is subject to vibrations from the system,
  - or if you want to avoid long neck tubes and/or protective tubes.
- Can be mounted directly on American-design sensors
- Wide range of approvals for use in potentially explosive atmospheres. "Intrinsically safe, non-sparking and flameproof" type of protections, for Europe and USA.
- SIL2 (with Order code C20), SIL2/3 (with C23)

#### Application

SITRANS TF can be used everywhere where temperatures need to be measured under particularly adverse conditions, or where a convenient local display is ideal. For that reasons users from all industries have opted for this field device. The rugged enclosure protects the electronics. The stainless steel model is almost completely resistant to sea water and other aggressive elements. The inner workings offer high measuring accuracy, universal input and a wide range of diagnostic options.

#### Function

##### Configuration

The communication capability over the HART protocol V 5.9 of the SITRANS TF with an integrated SITRANS TH300 permits parameterization using a PC or HART communicator (hand-held communicator). The SIMATIC PDM makes it easy.

Parameterization is carried out using a PC for SITRANS TF with the integrated and programmable SITRANS TK. Available for this purpose are a special modem and the software tool SIPROM T.

##### Mode of operation

###### Mode of operation of SITRANS TF as temperature transmitter


The sensor signal, whether resistance thermometer, thermocouple element or  $\Omega$  or mV signal, is amplified and linearized. Sensor and output side are electrically isolated. An internal cold junction is integrated for measurements with thermocouple elements.

The device outputs a temperature-linear direct current of 4 to 20 mA. As well as the analog transmission of measured values from 4 to 20 mA, the HART version also supports digital communication for online diagnostics, measured value transmission and configuration.

SITRANS TF automatically detects when a sensor should be interrupted or is indicating a short-circuit. The practical test terminals allow direct measurement of 4 to 20 mA signals over an ammeter without interrupting the output current loop.

###### Mode of operation of SITRANS TF as field indicator

Any 4 to 20 mA signal can be applied to the generous terminal block. As well as a range of predefined measurement units, the adjustable indicator also supports the input of customized units. This means that any 4 to 20 mA signal can be represented as any type of unit, e.g. pressure, flow rate, filling level or temperature.

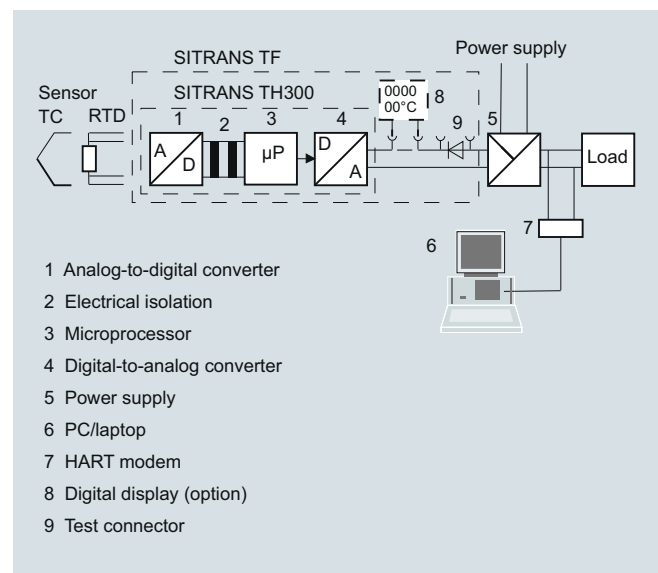

Mode of operation: SITRANS TF with integrated transmitter and digital display

## Temperature Measurement

### Transmitter for field mounting/field indicator

#### SITRANS TF - Transmitter, two-wire system and SITRANS TF - Field indicator for 4 to 20 mA

#### Technical specifications

##### Input

##### Resistance thermometer

Measured variable	Temperature
Sensor type	
• to IEC 60751	Pt25 ... Pt1000
• to JIS C 1604; a=0.00392 K-1	Pt25 ... Pt1000
• to IEC 60751	Ni25 ... Ni1000
Units	°C and °F
Connection	
• Normal connection	1 resistance thermometer (RTD) in 2-wire, 3-wire or 4-wire system
• Generation of average value	Series or parallel connection of several resistance thermometers in a two-wire system for the generation of average temperatures or for adaptation to other device types
• Generation of difference	2 resistance thermometers (RTD) in 2-wire system (RTD 1 – RTD 2 or RTD 2 – RTD 1)
Interface	
• Two-wire system	Parameterizable line resistance $\leq 100 \Omega$ (loop resistance)
• Three-wire system	No balancing required
• Four-wire system	No balancing required
Sensor current	$\leq 0.45$ mA
Response time	$\leq 250$ ms for 1 sensor with open-circuit monitoring
Open-circuit monitoring	Always active (cannot be disabled)
Short-circuit monitoring	can be switched on/off (default value: ON)
Measuring range	parameterizable (see table "Digital measuring errors")
Min. measured span	10 °C (18 °F)
Characteristic curve	Temperature-linear or special characteristic

##### Resistance-based sensors

Measured variable	Actual resistance
Sensor type	Resistance-based, potentiometers
Units	$\Omega$
Connection	
• Normal connection	1 resistance-based sensor (R) in 2-wire, 3-wire or 4-wire system
• Generation of average value	2 resistance-based sensors in 2-wire system for generation of average value
• Generation of difference	2 resistance-based sensor in 2-wire system (R 1 – R 2 or R 2 – R 1)
Interface	
• Two-wire system	Parameterizable line resistance $\leq 100 \Omega$ (loop resistance)
• Three-wire system	No balancing required
• Four-wire system	No balancing required
Sensor current	$\leq 0.45$ mA
Response time	$\leq 250$ ms for 1 sensor with open-circuit monitoring
Open-circuit monitoring	Can be switched off
Short-circuit monitoring	Can be switched off (value is adjustable)

Measuring range	parameterizable max. 0 ... 2200 $\Omega$ (see table "Digital measuring errors")
Min. measured span	5 ... 25 $\Omega$ (see Table "Digital measuring errors")
Characteristic curve	Resistance-linear or special characteristic
<u>Thermocouples</u>	
Measured variable	Temperature
Sensor type (thermocouples)	
• Type B	Pt30Rh-Pt6Rh to DIN IEC 584
• Type C	W5 %-Re acc. to ASTM 988
• Type D	W3 %-Re acc. to ASTM 988
• Type E	NiCr-CuNi to DIN IEC 584
• Type J	Fe-CuNi to DIN IEC 584
• Type K	NiCr-Ni to DIN IEC 584
• Type L	Fe-CuNi to DIN 43710
• Type N	NiCrSi-NiSi to DIN IEC 584
• Type R	Pt13Rh-Pt to DIN IEC 584
• Type S	Pt10Rh-Pt to DIN IEC 584
• Type T	Cu-CuNi to DIN IEC 584
• Type U	Cu-CuNi to DIN 43710
Units	°C or °F
Connection	
• Normal connection	1 thermocouple (TC)
• Generation of average value	2 thermocouples (TC)
• Generation of difference	2 thermocouples (TC) (TC 1 – TC 2 or TC 2 – TC 1)
Response time	$\leq 250$ ms for 1 sensor with open-circuit monitoring
Open-circuit monitoring	Can be switched off
Cold junction compensation	
• Internal	With integrated Pt100 resistance thermometer
• External	With external Pt100 IEC 60751 (2-wire or 3-wire connection)
• External fixed	Cold junction temperature can be set as fixed value
Measuring range	parameterizable (see table "Digital measuring errors")
Min. measured span	Min. 40 ... 100 °C (72 ... 180 °F) (see table "Digital measuring errors")
Characteristic curve	Temperature-linear or special characteristic
<u>mV sensor</u>	
Measured variable	DC voltage
Sensor type	DC voltage source (DC voltage source possible over an externally connected resistor)
Units	mV
Response time	$\leq 250$ ms for 1 sensor with open-circuit monitoring
Open-circuit monitoring	Can be switched off
Measuring range	-10 ... +70 mV -100 ... +1100 mV
Min. measured span	2 mV or 20 mV
Overload capability of the input	-1.5 ... +3.5 V DC
Input resistance	$\geq 1$ M $\Omega$
Characteristic curve	Voltage-linear or special characteristic

## Temperature Measurement

### Transmitter for field mounting/field indicator

#### SITRANS TF - Transmitter, two-wire system and SITRANS TF - Field indicator for 4 to 20 mA

<b>Output</b>		<b>Auxiliary power</b>	
Output signal	4 ... 20 mA, 2-wire	Without digital display	11 ... 35 V DC (30 V for Ex ib; 32 V for Ex ic and Ex nA)
Communication with SITRANS TH300	acc. to HART Rev. 5.9	With digital display	13.1 ... 5 V DC (30 V for Ex ib; 32 V for Ex ic and Ex nA)
<b>Digital display</b>		Electrically isolated	Between input and output
Digital display (optional)	In current loop	• Test voltage	$U_{\text{eff}} = 1 \text{ kV}$ , 50 Hz, 1 min
Display	Max. 5 digits	<b>Certificates and approvals</b>	
Digit height	9 mm (0.35 inch)	Explosion protection ATEX	
Display range	-99 999 ... + 99 999	• "Intrinsic safety" type of protection	with digital display: II 2 (1) G Ex ib [ia Ga] IIC T4 Gb II 2 G Ex ib IIC T4 Gb II 1D Ex ia IIIC T100 °C Da
Units	any (max. 5 char.)		without digital display: II 2 (1) G Ex ib [ia Ga] IIC T6 Gb II 2 G Ex ib IIC T6 Gb II 1D Ex ia IIIC T100 °C Da
Setting: Zero point, full-scale value and unit	with 3 buttons		ZELM 11 ATEX 0471 X
Load voltage	2.1 V		II 3 G Ex ic IIC T6/T4 Gc II 3 G Ex nA IIC T6/T4 Gc II 3 G Ex nA [ic] IIC T6/T4 Gc
<b>Measuring accuracy</b>			ZELM 11 ATEX 0471 X
Digital measuring errors	See table "Digital measuring errors"	- EC type test certificate	II 2 G Ex d IIC T6/T5 Gb II 2 D Ex tb IIIC T100 °C Db
Reference conditions		• "Operating equipment that is non-ignitable and has limited energy for zone 2" type of protection	ZELM 11 ATEX 0472 X
• Auxiliary power	24 V ± 1 %	- EC type test certificate	Certificate of Compliance 3017742
• Load	500 Ω	• "Flame-proof enclosure" type of protection	• XP/II/1/BCD/T5 Ta = 85 °C (185 °F), T6 Ta = 60 °C (140 °F), Type 4X
• Ambient temperature	23 °C (73.4 °F)	- EC type test certificate	• DIP/II, III/1/EFG/T5 Ta = 85 °C (185 °F), T6 Ta = 60 °C (140 °F), Type 4X
• Warming-up time	> 5 min		• NI/II/2/ABCD/T5 Ta = 85 °C (185 °F), T6 Ta = 60 °C (140 °F), Type 4X
Error in the analog output (digital/analog converter)	< 0.025 % of span		• S/II, III/2/FG/T5 Ta = 85 °C (185 °F), T6 Ta = 60 °C (140 °F), Type 4X
Error due to internal cold junction	< 0.5 °C (0.9 °F)	Explosion protection to FM	
Influence of ambient temperature		• Identification (XP, DIP, NI, S)	
• Analog measuring error	0.02 % of span/10 °C (18 °F)		Other certificates
• Digital measuring errors			IECEx, EAC Ex(GOST), INMETRO, NEPSI, KOSHA
- with resistance thermometers	0.06 °C (0.11 °F)/10°C (18 °F)		
- with thermocouples	0.6 °C (1.1 °F)/10°C (18 °F)		
Auxiliary power effect	< 0.001 % of span/V		
Effect of load impedance	< 0.002 % of span/100 Ω		
Long-term drift			
• In the first month	< 0.02 % of span		
• After one year	< 0.3 % of span		
• After 5 years	< 0.4 % of span		
<b>Conditions of use</b>		<b>Hardware and software requirements</b>	
<u>Ambient conditions</u>		• For the parameterization software SIPROM T for SITRANS TF with TH200	
Storage temperature	-40 ... +85 °C (-40 ... +185 °F)	- Personal computer	PC with CD-ROM drive and USB
Condensation	Permissible	- PC operating system	Windows 98, NT, 2000, XP, 7 and Win 8
Electromagnetic compatibility	According to EN 61326 and NAMUR NE21	• For the parameterization software SIMATIC PDM for SITRANS TH300	See chapter 8 "Software", "SIMATIC PDM"
Degree of protection to EN 60529	IP66/67/68		
<b>Construction</b>		<b>Communication</b>	
Weight	Approx. 1.5 kg (3.3 lb) without options	Load for HART connection	230 ... 1100 Ω
Dimensions	See "Dimensional drawings"	• Two-core shielded	≤ 3.0 km (1.86 mi)
Enclosure material	Die-cast aluminum, low in copper, GD-AlSi 12 or stainless steel, polyester-based lacquer, stainless steel rating plate	• Multi-core shielded	≤ 1.5 km (0.93 mi)
Electrical connection, sensor connection	Screw terminals, cable inlet via M20 x 1.5 or ½-14 NPT screwed gland	Protocol	HART protocol, version 5.9
Mounting bracket (optional)	Steel, galvanized and chrome-plated or stainless steel	<b>Factory setting (transmitter):</b>	
		• Pt100 (IEC 751) with 3-wire circuit	
		• Measuring range: 0 ... 100 °C (32 ... 212 °F)	
		• Error signal in the event of sensor breakage: 22.8 mA	
		• Sensor offset: 0 °C (0 °F)	
		• Damping 0.0 s	

## Temperature Measurement

Transmitter for field mounting/field indicator

### SITRANS TF - Transmitter, two-wire system and SITRANS TF - Field indicator for 4 to 20 mA

#### Digital measuring errors

##### Resistance thermometer

Input	Measuring range °C / (°F)	Min. mea- sured span		Digital accuracy	
		°C	(°F)	°C	(°F)
<b>to IEC 60751</b>					
Pt25	-200 ... +850 (-328 ... +1562)	10	(18)	0.3	(0.54)
Pt50	-200 ... +850 (-328 ... +1562)	10	(18)	0.15	(0.27)
Pt100 ... Pt200	-200 ... +850 (-328 ... +1562)	10	(18)	0.1	(0.18)
Pt500	-200 ... +850 (-328 ... +1562)	10	(18)	0.15	(0.27)
Pt1000	-200 ... +350 (-328 ... +662)	10	(18)	0.15	(0.27)
<b>to JIS C1604-81</b>					
Pt25	-200 ... +649 (-328 ... +1200)	10	(18)	0.3	(0.54)
Pt50	-200 ... +649 (-328 ... +1200)	10	(18)	0.15	(0.27)
Pt100 ... Pt200	-200 ... +649 (-328 ... +1200)	10	(18)	0.1	(0.18)
Pt500	-200 ... +649 (-328 ... +1200)	10	(18)	0.15	(0.27)
Pt1000	-200 ... +350 (-328 ... +662)	10	(18)	0.15	(0.27)
Ni 25 ... Ni1000	-60 ... +250 (-76 ... +482)	10	(18)	0.1	(0.18)

##### Resistance-based sensors

Input	Measuring range Ω	Min. mea- sured span Ω	Digital accuracy Ω
Resistance	0 ... 2200	25	0.25

#### Thermocouples

Input	Measuring range °C / (°F)	Min. mea- sured span		Digital accuracy	
		°C	(°F)	°C	(°F)
Type B	100 ... 1820 (212 ... 3308)	100	(180)	2 <sup>1)</sup>	(3.6) <sup>1)</sup>
Type C (W5)	0 ... 2300 (32 ... 4172)	100	(180)	2	(3.6)
Type D (W3)	0 ... 2300 (32 ... 4172)	100	(180)	1 <sup>2)</sup>	(1.8) <sup>2)</sup>
Type E	-200 ... +1000 (-328 ... +1832)	50	(90)	1	(1.8)
Type J	-200 ... +1200 (-328 ... +2192)	50	(90)	1	(1.8)
Type K	-200 ... +1370 (-328 ... +2498)	50	(90)	1	(1.8)
Type L	-200 ... +900 (-328 ... +1652)	50	(90)	1	(1.8)
Type N	-200 ... +1300 (-328 ... +2372)	50	(90)	1	(1.8)
Type R	-50 ... +1760 (-58 ... +3200)	100	(180)	2	(3.6)
Type S	-50 ... +1760 (-58 ... +3200)	100	(180)	2	(3.6)
Type T	-20 ... +400 (-328 ... +752)	40	(72)	1	(1.8)
Type U	-200 ... +600 (-328 ... +1112)	50	(90)	2	(3.6)

1) The digital accuracy in the range 100 to 300 °C (212 to 572 °F) is 3 °C (5.4 °F).

2) The digital accuracy in the range 1750 to 2300 °C (3182 to 4172 °F) is 2 °C (3.6 °F).

#### mV sensor

Input	Measuring span mV	Min. mea- sured span mV	Digital accuracy μV
mV sensor	-100 ... +1100	20	400

The digital accuracy is the accuracy after the analog/digital conversion including linearization and calculation of the measured value.

An additional error is generated in the output current 4 to 20 mA as a result of the digital/analog conversion of 0.025 % of the set span (digital-analog error).

The total error under reference conditions at the analog output is the sum from the digital error and the digital-analog error (poss. with the addition of cold junction errors in the case of thermocouple measurements).



## Temperature Measurement

Transmitter for field mounting/field indicator

### SITRANS TF - Transmitter, two-wire system and SITRANS TF - Field indicator for 4 to 20 mA

Selection and Ordering data	Order code
<b>Customer-specific programming</b> Add <b>"-Z"</b> to Article No. and specify Order code(s)	
Measuring range to be set Specify in plain text (max. 5 digits): Y01: ... to ... °C, °F	<b>Y01<sup>3)</sup></b>
Measuring point no. (TAG), max. 8 characters	<b>Y17<sup>4)</sup></b>
Meas. point descriptor, max. 16 characters	<b>Y23<sup>5)</sup></b>
Meas. point message, max. 32 characters	<b>Y24<sup>5)</sup></b>
Only inscription on measuring point label: specify in plain text: Measuring range	<b>Y22<sup>5)</sup></b>
Pt100 (IEC) 2-wire, $R_L = 0 \Omega$	<b>U02<sup>6)</sup></b>
Pt100 (IEC) 3-wire	<b>U03<sup>6)</sup></b>
Pt100 (IEC) 4-wire	<b>U04<sup>6)</sup></b>
Thermocouple type B	<b>U20<sup>6)7)</sup></b>
Thermocouple type C (W5)	<b>U21<sup>6)7)</sup></b>
Thermocouple type D (W3)	<b>U22<sup>6)7)</sup></b>
Thermocouple type E	<b>U23<sup>6)7)</sup></b>
Thermocouple type J	<b>U24<sup>6)7)</sup></b>
Thermocouple type K	<b>U25<sup>6)7)</sup></b>
Thermocouple type L	<b>U26<sup>6)7)</sup></b>
Thermocouple type N	<b>U27<sup>6)7)</sup></b>
Thermocouple type R	<b>U28<sup>6)7)</sup></b>
Thermocouple type S	<b>U29<sup>6)7)</sup></b>
Thermocouple type T	<b>U30<sup>6)7)</sup></b>
Thermocouple type U	<b>U31<sup>6)7)</sup></b>
With TC: CJC external (Pt100, 3-wire)	<b>U41</b>
With TC: CJC external with fixed value, specify in plain text	<b>Y50</b>
Special differing customer-specific programming, specify in plain text	<b>Y09<sup>8)</sup></b>
Fail-safe value 3.6 mA (instead of 22.8 mA)	<b>U34<sup>4)</sup></b>

Supply units see Chapter "Supplementary Components".

- 1) Without cable gland.
- 2) Option does not include ATEX/IECEx approval, only country-specific approval.
- 3) For customer-specific programming for RTD and TC, the start value and the end value of the required measuring span must be specified here. For specification on TAG plate, please select Y22.
- 4) For this selection, Y01 or Y09 must also be selected. For specification on TAG plate, please select Y23.
- 5) If only Y22, Y23 or Y24 are ordered and the label only has to be on the tag plate, Y01 does not have to be specified.
- 6) For this selection, Y01 must also be selected.
- 7) Internal reference junction compensation is selected as the default for TC.
- 8) For customer-specific programming, for example mV and ohm, the start value and the end value of the required measuring span and the unit must be entered here.

Selection and Ordering data	Article No.
<b>Accessories</b> Further accessories for assembly, connection and transmitter configuration, see page 2/238.	
<b>Modem for SITRANS TH100, TH200, TR200 and TF with TH200 incl. parameterization software T</b> with USB interface	<b>7NG3092-8KN</b>
<b>HART modem</b> With USB interface	<b>7MF4997-1DB</b>
<b>SIMATIC PDM parameterization software</b> also for SITRANS TH300	<b>see chapter 8</b>
<b>Mounting bracket and securing parts</b> Made of steel for 7NG313.-.B.. Made of steel for 7NG313.-.C.. Made of stainless steel for 7NG313.-.B.. Made of stainless steel for 7NG313.-.C..	<b>7MF4997-1AC</b> <b>7MF4997-1AB</b> <b>7MF4997-1AJ</b> <b>7MF4997-1AH</b>
<b>Digital indicator<sup>1)</sup></b>	<b>7MF4997-1BS</b>
<b>Connection board</b>	<b>A5E02226423</b>

<sup>1)</sup> It is not possible to upgrade devices with Ex protection

#### Ordering example 1:

7NG3135-0AB11-Z Y01+Y23+U03  
Y01: -10 ... +100 °C  
Y23: TICA1234HEAT

#### Ordering example 2:

7NG3136-0AC11-Z Y01+Y23+Y24+U25  
Y01: -10 ... +100 °C  
Y23: TICA 1234 ABC  
Y24: HEATING BOILER 56789

#### Factory setting (transmitter):

- Pt100 (IEC 751) with three-wire circuit
- Measuring range: 0 ... 100 °C (32 ... 212 °F)
- Fault current 22.8 mA
- Sensor offset: 0 °C (0 °F)
- Damping 0.0 s






## Temperature Measurement

Transmitter for field mounting/field indicator

SITRANS TF - Transmitter, two-wire system and SITRANS TF - Field indicator for 4 to 20 mA

### Dimensional drawings

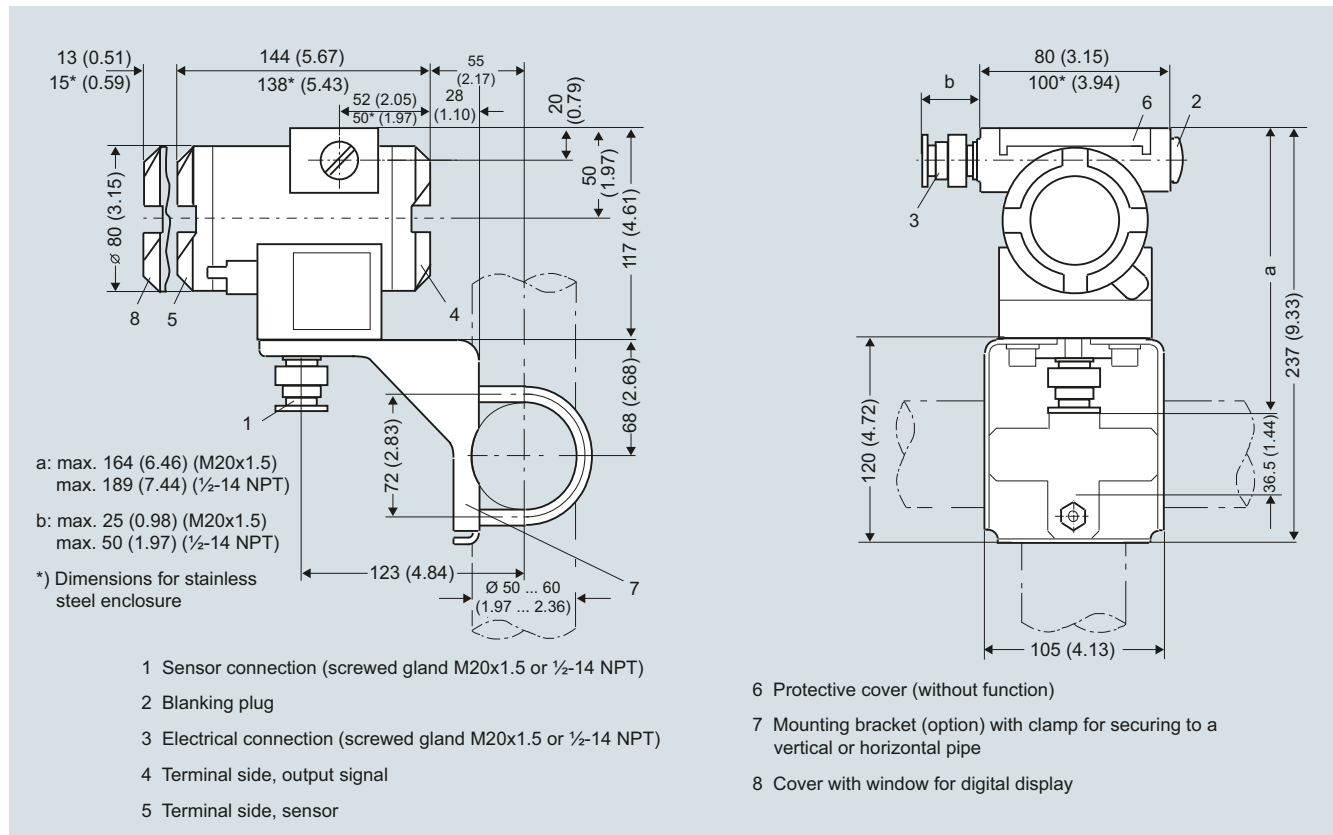


SITRANS TF, dimensions in mm (inches)




#### Schematics


##### Resistance thermometer




Two-wire system <sup>1)</sup>



Three-wire system




Four-wire system




Generation of average value / difference <sup>1)</sup>

<sup>1)</sup> Programmable line resistance for the purpose of correction.


##### Resistance




Two-wire system <sup>1)</sup>



Three-wire system




Four-wire system




Generation of average value / difference <sup>1)</sup>


##### Thermocouple




Cold junction compensation  
Internal/fixed value



Cold junction compensation with  
external Pt100 in two-wire system <sup>1)</sup>




Cold junction compensation with  
external Pt100 in three-wire system




Generation of average value / difference  
with internal cold junction compensation

##### Voltage measurement



##### Current measurement



SITRANS TF, sensor connection assignment

2

## Temperature Measurement

### Transmitters for field mounting

#### SITRANS TF fieldbus transmitter

##### Overview



##### Our field devices for heavy industrial use

- FOUNDATION fieldbus
- PROFIBUS PA

The SITRANS TF temperature transmitter works where others can't cope.

##### Benefits

- For universal use as a transmitter for resistance thermometers, thermocouple elements,  $\Omega$  or mV signals
- Rugged two-chamber enclosure in die-cast aluminium or stainless steel
- Degree of protection IP66/67/68
- Can be mounted elsewhere if the measuring point
  - is hard to access,
  - is subject to high temperatures,
  - is subject to vibrations from the system,
  - or if you want to avoid long neck tubes and/or protective tubes.
- Can be mounted directly on American-design sensors
- Wide range of approvals for use in potentially explosive atmospheres. "Intrinsically safe, non-sparking and flameproof" type of protection, for Europe and USA

##### Application

The SITRANS TF can be used everywhere where temperatures need to be measured under particularly harsh conditions. For that reason users from all industries have opted for this field device.

The rugged enclosure protects the electronics. The stainless steel model is almost completely resistant to sea water and other aggressive elements.

The inner workings offer high measuring accuracy, universal input and a wide range of diagnostic options.

##### Function

###### Features

- Polarity-neutral bus connection
- 24-bit analog-digital converter for high resolution
- Electrically isolated
- Version for use in hazardous areas
- Special characteristic
- Sensor redundancy

###### Transmitter with PROFIBUS PA communication

- Function blocks: 2 x analog


###### Transmitter with FOUNDATION fieldbus communication

- Function blocks: 2 x analog and 1 x PID
- Functionality: Basic or LAS

###### Mode of operation


The following function diagram explains the mode of operation of the transmitter.

The only difference between the two versions of the SITRANS TF (7NG3137-... and 7NG3138-...) is the type of field bus protocol used (PROFIBUS PA or FOUNDATION fieldbus).

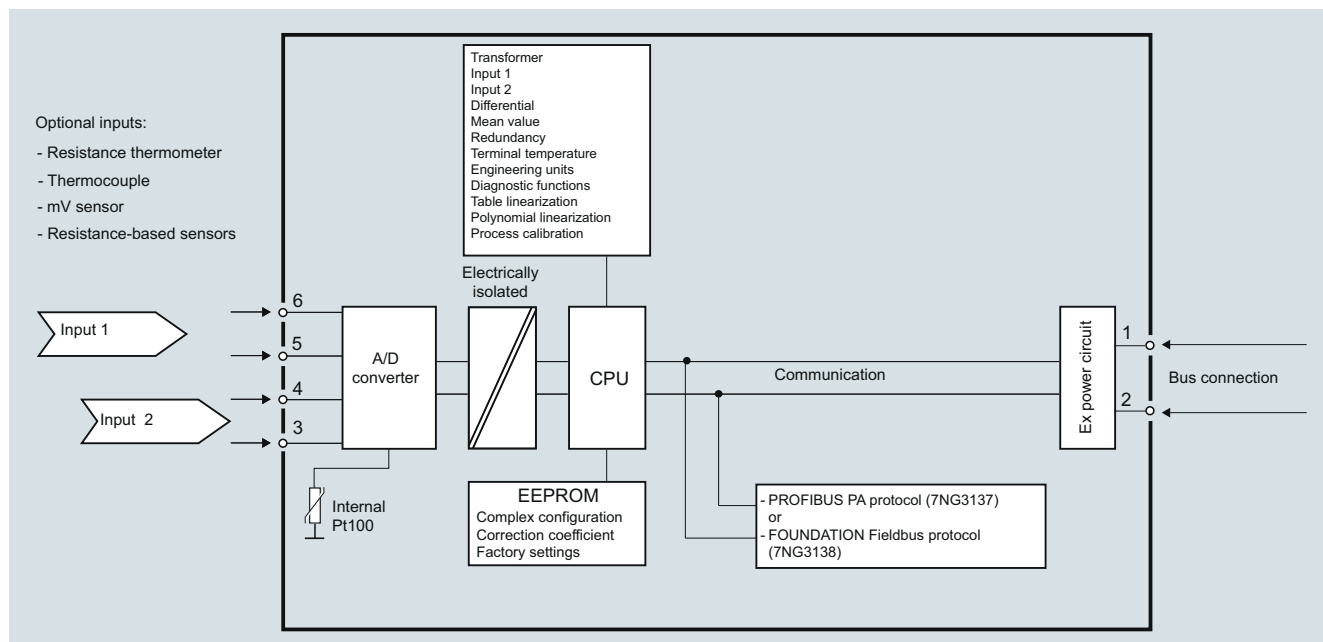

SITRANS TF with TH400, function diagram

### System communication

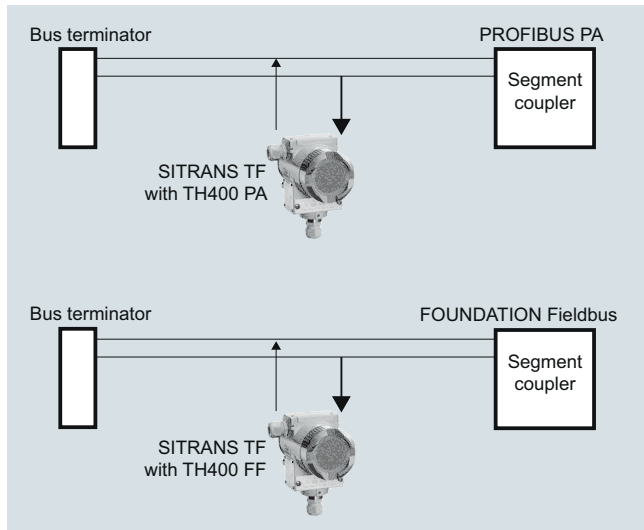

SITRANS TF with TH400, communication interface

### Technical specifications

#### Input

Analog/digital conversion

- Measurement rate < 50 ms
- Resolution 24-bit

#### Resistance thermometer

Pt25 ... 1000 to IEC 60751/JIS C 1604

- Measuring range -200 ... +850 °C (-328 ... +1562 °F)

Ni25 ... 1000 to DIN 43760

- Measuring range -60 ... +250 °C (-76 ... +482 °F)

Cu10 ... 1000,  $\alpha = 0.00427$ 

- Measuring range -50 ... +200 °C (-58 ... +392 °F)

Line resistance per sensor cable Max. 50  $\Omega$ 

Sensor current Nominal 0.2 mA

Sensor fault detection

- Sensor break detection Yes
- Sensor short-circuit detection Yes, < 15  $\Omega$

#### Resistance-based sensors

Measuring range 0 ... 10 k $\Omega$ Line resistance per sensor cable Max. 50  $\Omega$ 

Sensor current Nominal 0.2 mA

Sensor fault detection

- Sensor break detection Yes
- Sensor short-circuit detection Yes, < 15  $\Omega$

#### Thermocouple

to IEC 584

- Type B Measuring range 400 ... 1820 °C (752 ... 3308 °F)
- Type E -100 ... +1000 °C (-148 ... +1832 °F)
- Type J -100 ... +1000 °C (-148 ... +1832 °F)
- Type K -100 ... +1200 °C (-148 ... +2192 °F)
- Type N -180 ... +1300 °C (-292 ... +2372 °F)
- Type R -50 ... +1760 °C (-58 ... +3200 °F)
- Type S -50 ... +1760 °C (-58 ... +3200 °F)
- Type T -200 ... +400 °C (-328 ... +752 °F)

to DIN 43710

- Type L -200 ... +900 °C (-328 ... +1652 °F)
- Type U -200 ... +600 °C (-328 ... +1112 °F)

to ASTM E988-90

- Type W3 0 ... 2300 °C (32 ... 4172 °F)
- Type W5 0 ... 2300 °C (32 ... 4172 °F)

External cold junction compensation -40 ... +135 °C (-40 ... +275 °F)

Sensor fault detection

- Sensor break detection Yes
- Sensor short-circuit detection Yes, < 3 mV
- Sensor current in the event of open-circuit monitoring 4  $\mu$ A

#### mV sensor - voltage input

Measuring range -800 ... +800 mV

Input resistance 10 M $\Omega$ 

#### Output

Filter time (programmable) 0 ... 60 s

Update time &lt; 400 ms

#### Measuring accuracy

Accuracy is defined as the higher value of general values and basic values.

#### General values

Type of input	Absolute accuracy	Temperature coefficient
All	$\leq \pm 0.05$ % of the measured value	$\leq \pm 0.002$ % of the measured value/°C

#### Basic values

Type of input	Basic accuracy	Temperature coefficient
Pt100 and Pt1000	$\leq \pm 0.1$ °C	$\leq \pm 0.002$ °C/°C
Ni100	$\leq \pm 0.15$ °C	$\leq \pm 0.002$ °C/°C
Cu10	$\leq \pm 1.3$ °C	$\leq \pm 0.02$ °C/°C
Resistance-based sensors	$\leq \pm 0.05$ $\Omega$	$\leq \pm 0.002$ $\Omega$ /°C
Voltage source	$\leq \pm 10$ $\mu$ V	$\leq \pm 0.2$ $\mu$ V/°C
Thermocouple, type: E, J, K, L, N, T, U	$\leq \pm 0.5$ °C	$\leq \pm 0.01$ °C/°C
Thermocouple, type: B, R, S, W3, W5	$\leq \pm 1$ °C	$\leq \pm 0.025$ °C/°C
Cold junction compensation	$\leq \pm 0.5$ °C	

#### Reference conditions

Warming-up time	30 s
Signal-to-noise ratio	Min. 60 dB
Calibration condition	20 ... 28 °C (68 ... 82 °F)

## Temperature Measurement

### Transmitters for field mounting

#### SITRANS TF fieldbus transmitter

##### Conditions of use

###### Ambient conditions

Permissible ambient temperature	-40 ... +85 °C (-40 ... +185 °F)
Permissible storage temperature	-40 ... +85 °C (-40 ... +185 °F)
Relative humidity	≤ 98 %, with condensation

###### Insulation resistance

• Test voltage	500 V AC for 60 s
• Continuous operation	50 V AC/75 V DC

###### Electromagnetic compatibility

NAMUR	NE21
EMC 2014/30/EU Emission and Noise Immunity	EN 61326-1, EN 61326-2-5

##### Construction

Weight	Approx. 1.5 kg (3.3 lb) without options
Dimensions	See "Dimensional drawings"
Enclosure materials	<ul style="list-style-type: none"> <li>Die-cast aluminum, low in copper, GD-AISI 12 or stainless steel</li> <li>Polyester-based lacquer for GD AISi 12 enclosure</li> <li>Stainless steel rating plate</li> </ul>
Electrical connection, sensor connection	<ul style="list-style-type: none"> <li>screw terminals</li> <li>Cable inlet via M20 x 1.5 or ½ -14 NPT screwed gland</li> <li>Bus connection with M12 device plug (optional)</li> </ul>
Mounting bracket (optional)	Steel, galvanized and chrome-plated or stainless steel
Degree of protection	IP66/67 to EN 60529

##### Auxiliary power

Power supply	
• Standard, Ex "d", Ex "nA", Ex "nL", XP, NI	10.0 ... 32 V DC
• Ex "ia", Ex "ib"	10.0 ... 30 V DC
• In FISCO/FNICO installations	10.0 ... 17.5 V DC
Power consumption	< 11 mA
Max. increase in power consumption in the event of a fault	< 7 mA

##### Certificates and approvals

Explosion protection ATEX	
EC type test certificate	ZELM 11 ATEX 0471 X
• Type of protection "intrinsic safety i" (version: 7NG313x-1xxxx)	II 2 (1) G Ex ib [ia Ga] IIC T6 Gb II 2 G Ex ib IIC T6 Gb II 1D Ex ia IIIC T100 °C Da
Conformity statement	ZELM 11 ATEX 0471 X
• "Operating equipment that is non-ignitable and has limited energy" type of protection (version: 7NG313x-2xxxx)	II 3 G Ex ic IIC T6/T4 Gc II 3 G Ex nA IIC T6/T4 Gc II 3 G Ex nA [ic] IIC T6/T4 Gc
EC type test certificate	ZELM 11 ATEX 0472 X
• "Flame-proof enclosure" type of protection (version: 7NG313x-4xxxx)	II 2 G Ex d IIC T6/T5 Gb II 2 D Ex tb IIIC T100 °C Db
Explosion protection: FM for USA	
• FM approval	FM 3017742
• Type of protection XP, DIP, NI and S (version 7NG313x-5xxxx)	XP / I / 1 / BCD / T5,T6; Type 4X DIP / II, III / 1 / EFG / T5,T6; Type 4X NI / I / 2 / ABCD / T5,T6; Type 4X S / II, III / 2 / FG T5,T6; Type 4X
Other certificates	EAC Ex(GOST), INMETRO, NEPSI, KOSHA

##### Communication

###### Parameterization interface

• PROFIBUS PA connection	
- Protocol	A&D profile, Version 3.0
- Protocol	EN 50170 Volume 2
- Address (for delivery)	126
- Function blocks	2 x analog
• FOUNDATION fieldbus connection	
- Protocol	FF protocol
- Protocol	FF design specifications
- Functionality	Basic or LAS
- Version	ITK 4.6
- Function blocks	2 x analog and 1 x PID

##### Factory setting

###### for SITRANS TH400 PA

Sensor	Pt100 (IEC)
Type of connection	3-wire circuit
Unit	°C
Failure mode	Last valid value
Filter time	0 s
PA address	126
PROFIBUS Ident No.	Manufacturer-specific

###### for SITRANS TH400 FF

Sensor	Pt100 (IEC)
Type of connection	3-wire circuit
Unit	°C
Failure mode	Last valid value
Filter time	0 s
Node address	22



## Temperature Measurement

### Transmitters for field mounting

#### SITRANS TF fieldbus transmitter


Selection and Ordering data	Order code.
<b>Customer-specific programming</b> Add <b>"-Z"</b> to Article No. and specify Order code(s)	
Measuring range to be set Specify in plain text (max. 5 digits): Y01: ... to ... °C, °F	<b>Y01<sup>4)</sup></b>
Meas. point no. (TAG), max. 8characters	<b>Y15<sup>5)</sup></b>
Meas. point descriptor, max. 16 characters	<b>Y23<sup>5)</sup></b>
Meas. point message, max. 32 characters	<b>Y24<sup>6)</sup></b>
Bus address, specify in plain text	<b>Y25<sup>5)</sup></b>
Pt100 (IEC) 2-wire, $R_L = 0 \Omega$	<b>U02<sup>7)</sup></b>
Pt100 (IEC) 3-wire	<b>U03<sup>7)</sup></b>
Pt100 (IEC) 4-wire	<b>U04<sup>7)</sup></b>
Thermocouple type B	<b>U20<sup>7)8)</sup></b>
Thermocouple type C (W5)	<b>U21<sup>7)8)</sup></b>
Thermocouple type D (W3)	<b>U22<sup>7)8)</sup></b>
Thermocouple type E	<b>U23<sup>7)8)</sup></b>
Thermocouple type J	<b>U24<sup>7)8)</sup></b>
Thermocouple type K	<b>U25<sup>7)8)</sup></b>
Thermocouple type L	<b>U26<sup>7)8)</sup></b>
Thermocouple type N	<b>U27<sup>7)8)</sup></b>
Thermocouple type R	<b>U28<sup>7)8)</sup></b>
Thermocouple type S	<b>U29<sup>7)8)</sup></b>
Thermocouple type T	<b>U30<sup>7)8)</sup></b>
Thermocouple type U	<b>U31<sup>7)8)</sup></b>
With TC: CJC: external (Pt100, 3-wire)	<b>U41</b>
With TC: CJC: external with fixed value, specify in plain text	<b>Y50</b>
Special differing customer-specific programming, specify in plain text	<b>Y09<sup>9)</sup></b>

- 1) Without cable gland
- 2) Not available for explosion protection Ex d or XP.
- 3) Option does not include ATEX/IECEx approval, only country-specific approval.
- 4) For customer-specific programming for RTD and TC, the start value and the end value of the required measuring span must be specified here.
- 5) If only Y15, Y23 or Y25 are ordered and the label only has to be on the tag plate, Y01 does not have to be specified.
- 6) For this selection, Y01 or Y09 must also be selected.
- 7) For this selection, Y01 must also be selected.
- 8) Internal cold junction compensation is selected as the default for TC
- 9) For customer-specific programming, for example mV and ohm, the start value and the end value of the required measuring span and the unit must be entered here

Selection and Ordering data	Article No.
<b>Accessories</b> Further accessories for assembly, connection and transmitter configuration, see page 2/238.	
<b>SIMATIC PDM parameterization software</b> also for SITRANS TF with TH400 PA	<b>see Sec. 8</b>
<b>Mounting bracket and fastening parts</b> Made of steel for 7NG313.-.B.. Made of steel for 7NG313.-.C.. Made of stainless steel for 7NG313.-.B.. Made of stainless steel for 7NG313.-.C..	<b>7MF4997-1AC</b> <b>7MF4997-1AB</b> <b>7MF4997-1AJ</b> <b>7MF4997-1AH</b>
<b>Connection board</b> Ordering example 1: 7NG3137-0AB01-Z Y01+Y15+Y25+U03 Y01: -10 ... +100 °C Y15: TICA1234HEAT Y25: 33 Ordering example 2: 7NG3137-0AC01-Z Y01+Y15+Y25+U25 Y01: -10 ... +100 °C Y15: TICA 1234 ABC 5678 Y25: 35 Factory setting: • for SITRANS TH400 PA: - Pt100 (IEC) with 3-wire circuit - Unit: °C - Failure mode: last valid value - Filter time: 0 s - PA address: 126 - PROFIBUS Ident No.: manufacturer-specific • for SITRANS TH400 FF: - Pt100 (IEC) with 3-wire circuit - Unit: °C - Failure mode: last valid value - Filter time: 0 s - Node address: 22	<b>A5E02391790</b>



### Dimensional drawings

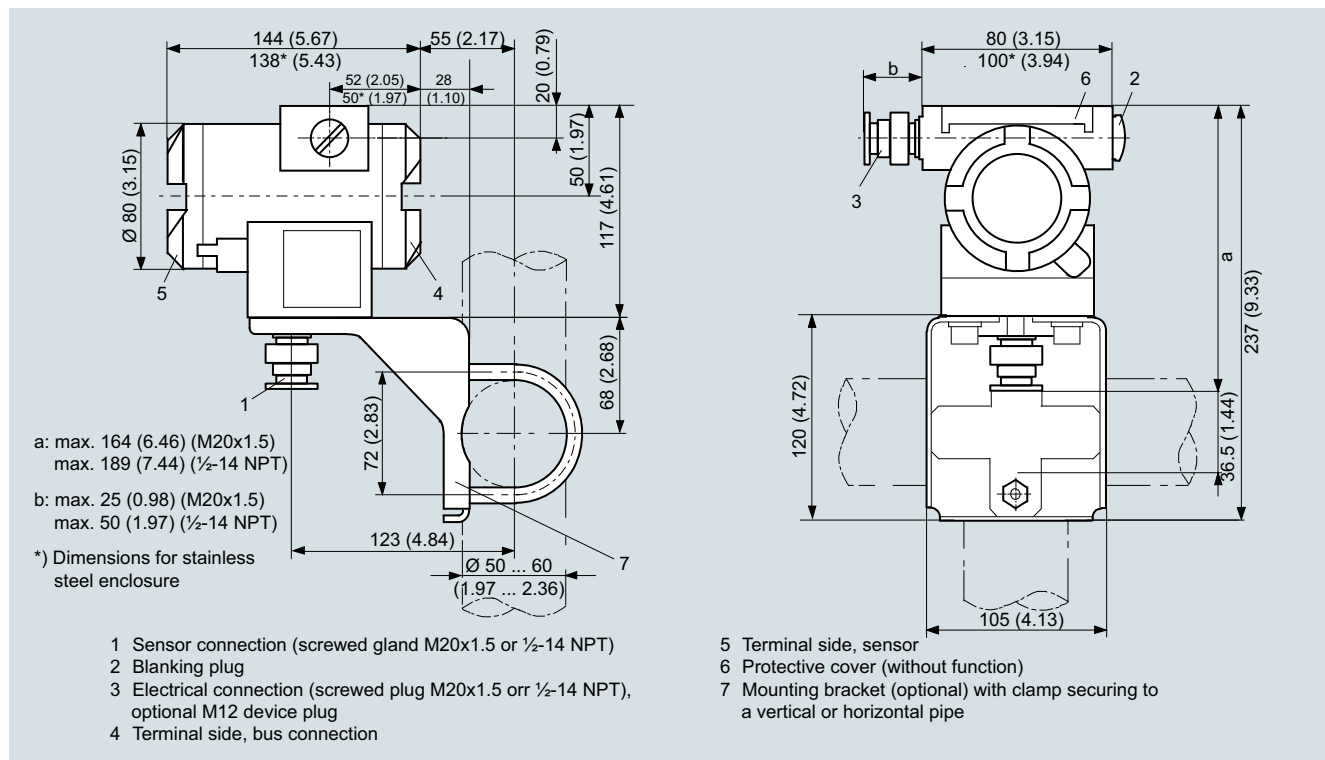

SITRANS TF with TH400, dimensions in mm (inches)


# Temperature Measurement

## Transmitters for field mounting

### SITRANS TF fieldbus transmitter

#### Schematics

2

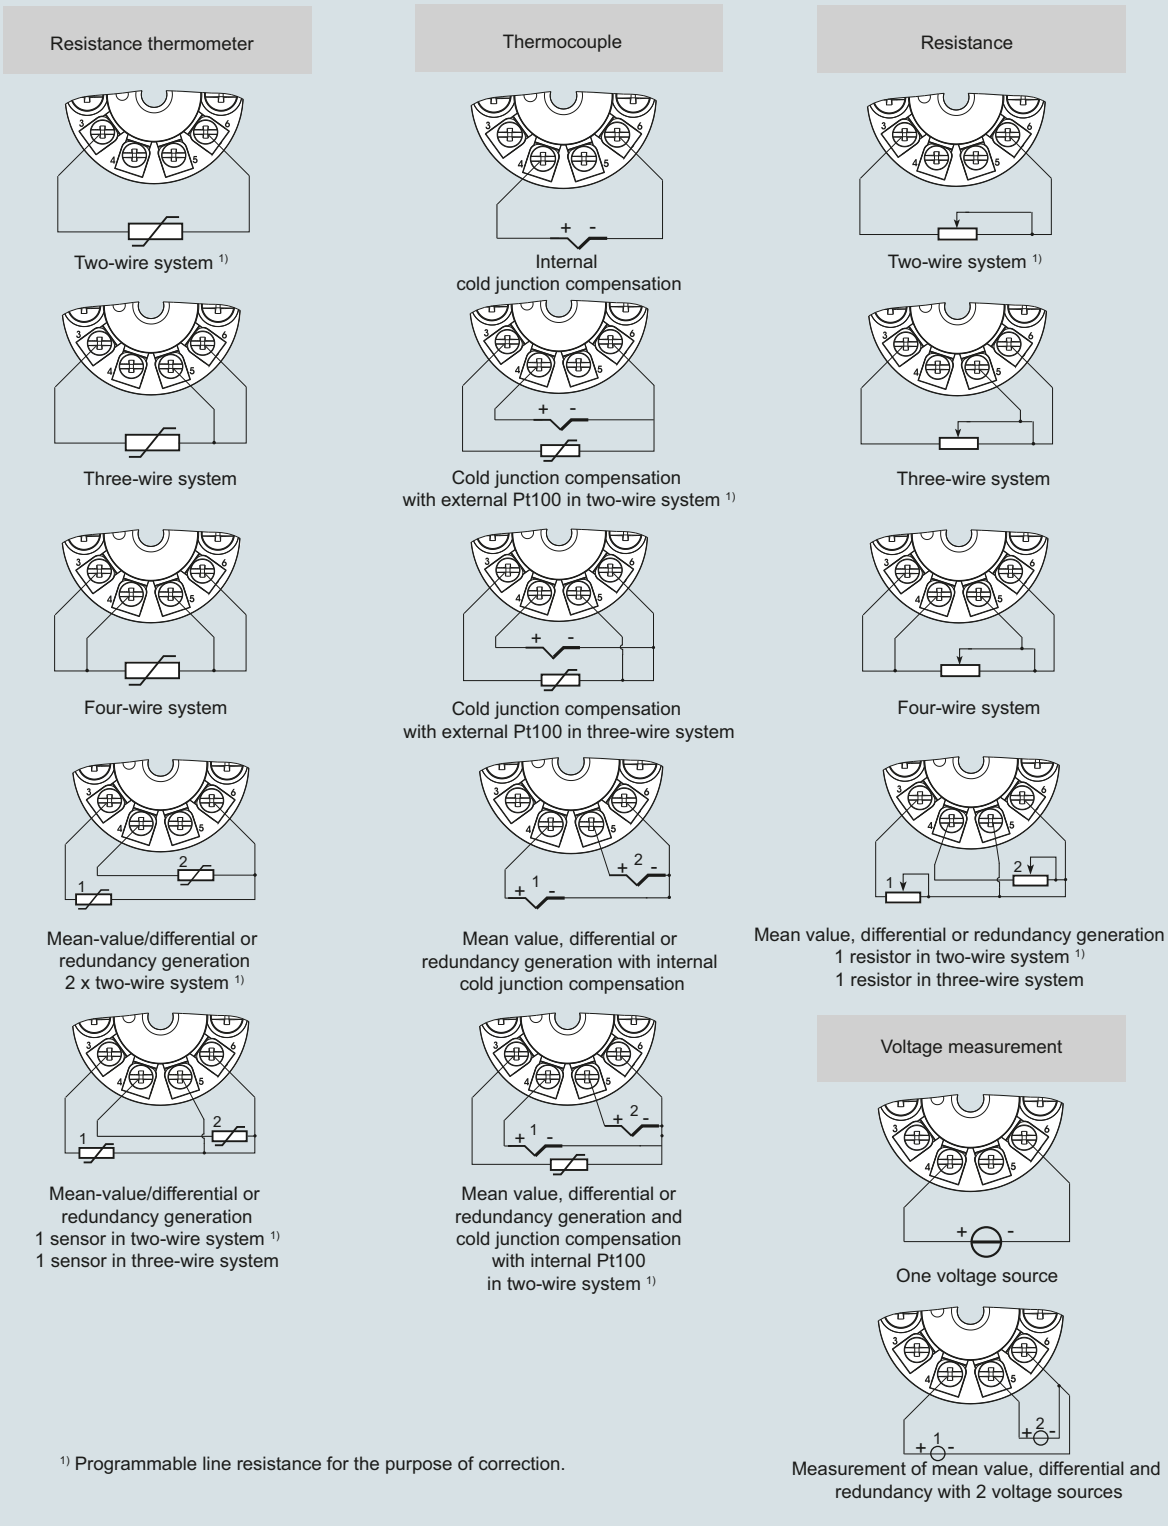

SITRANS TF with TH400, sensor connection assignment