

Overview



The SITRANS F M MAG 6000 I/MAG 6000 I Ex transmitter is designed for the demands in the process industry. The robust die cast aluminum housing provides superb protection, even in the most harsh industrial environments. Full input and output functionality is given even in the Ex version.

Benefits

- Full range of Ex-rated flowmeters with intrinsically safe rated input and outputs
- For compact or remote installation
- HART, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS PA and DP, Modbus RTU/RS 485 add-on communication modules available
- Superior signal resolution for optimum turn down ratio
- Digital signal processing with many possibilities
- Automatic reading of SENSORPROM data for easy commissioning
- User configurable operation menu with password protection
 - 3 lines, 20 characters display in 11 languages
 - Flow rate in various units
 - Totalizer for forward, reverse and net flow as well as much more information available.
- Multiple functional outputs for process control, minimum configuration with analogue, pulse/frequency and relay output (status, flow direction, limits)
- Comprehensive self-diagnostic for error indication and error logging
- Batch control
- MAG 6000 I NAMUR: compliant with NAMUR NE 21, NE 32, NE 43, NE 53 and NE 70

Design

The transmitter is designed for either compact or remote installation in non-hazardous or hazardous areas (compact mounted transmitter to be ordered together with the sensors).

Function

The following functions are available:

- Flow rate
- 2 measuring ranges
- 2 totalizers
- Low flow cut-off
- Flow direction
- Error system
- Operating time
- Uni-/bidirectional flow

- Limit switches and pulse output
- Batch control

The MAG 6000 I/6000 I Ex is a microprocessor-based transmitter with a built-in alphanumeric display in several languages. The transmitters evaluate the signals from the associated electromagnetic sensors and also fulfil the task of a power supply unit which provides the magnet coils with a constant current.

Further information on connection, mode of operation and installation can be found in the data sheets for the sensors.

Displays and keypads

Operation of the transmitter can be carried out using:

- Keypad and display unit
- HART communicator
- PC/laptop and SIMATIC PDM software via HART communication
- PC/laptop and SIMATIC PDM software using PROFIBUS or Modbus communication

Technical specifications

Mode of operation and design

Measuring principle	Electromagnetic with pulsed constant field
Empty pipe	Detection of empty pipe (special cable required in remote mounted installation)
Excitation frequency	Depend on sensor size
Electrode input impedance	$> 1 \times 10^{14} \Omega$

Input

Digital input	11 ... 30 V DC, $R_i = 4.4 \text{ k}\Omega$
• Activation time	50 ms
• Current	$I_{11 \text{ V DC}} = 2.5 \text{ mA}$, $I_{30 \text{ V DC}} = 7 \text{ mA}$

Output

Current output	
• Signal range	4 ... 20 mA (active/ passive)
• Load	$< 560 \Omega$
• Time constant	0.1 ... 30 s, adjustable
Digital output	
• Frequency	0 ... 10 kHz, 50 % duty cycle (uni-/bidirectional)
• Time constant	0.1 ... 30 s, adjustable
• Pulse (passive)	3 ... 30 V DC, max 110 mA (30 mA Ex version), $200 \Omega \leq R_i \leq 10 \text{ k}\Omega$ (powered from connected equipment)
• Time constant	0.1 ... 30 s, adjustable
Relay output	
• Time constant	Changeover relay, same as current output
• Load	42 V AC/2 A, 24 V DC/1 A

Low flow cut off	0 ... 9.9 % of maximum flow
-------------------------	-----------------------------

Galvanic isolation	All inputs and outputs are galvanic isolated
---------------------------	--

Max. measuring error

MAG 6000 I/MAG 6000 I Ex (incl. sensor)	$\pm 0.2 \% \pm 1 \text{ mm/s}$
---	---------------------------------

Flow Measurement

SITRANS F M

Transmitter MAG 6000 I/6000 I Ex

Rated operation conditions

Ambient temperature

• Operation

- MAG 6000 I
- MAG 6000 I Ex

• Storage

Mechanical load

Degree of protection

EMC performance

-20 ... +60 °C (-4 ... +140 °F)

-20 ... +60 °C (14 ... 140 °F)

-40 ... +70 °C (-40 ... +158 °F)

18 ... 1000 Hz random in x, y, z, directions for 2 hours according to EN 60068-2-36

Transmitter: 1.14 g RMS

IP67/NEMA 4X to IEC 529 and DIN 40050 (1 mH₂O 30 min.)IEC/EN 61326-1 (all environments)
IEC/EN 61326-2-5
NAMUR NE 21

Display and keypad

Totalizer

Display

Keypad

Time constant

Two eight-digit counters for forward, net or reverse flow

Background illumination with alphanumeric text, 3 x 20 characters to indicate flow rate, totalized values, settings and faults; Reverse flow indicated by negative sign

Capacitive touch keypad with LED light for feedback indication

Time constant as current output time constant

Design

Enclosure material

• Wall mounting

Dimensions

Weight

Die cast aluminum, with corrosion resistant Basic Polyester powder coating (min. 60 µm)

Wall mounting bracket enclosed for remote version

See dimensional drawings

See dimensional drawings

Power supply

- Standard transmitter: 18 ... 90 V DC; 115 ... 230 V AC +10 %/-15 %; 50 ... 60 Hz
- Ex transmitter: 18 ... 30 V DC
- Ex transmitter: 115 ... 230 V AC; 50 ... 60 Hz
- Ex transmitter NAMUR: 18 ... 30 V DC; 115 ... 230 V AC; 50 ... 60 Hz

Power consumption

- 230 V AC: 20 VA
- 24 V DC: 9.6 W, I_N = 0.4 A, I_{ST} = 1 A (3 ms)

Certificates and approvals

General purpose

Hazardous areas

- CE (LVD, EMC, PED, RoHS)
- ATEX, IECEx, FM, CSA, EAC Ex, NEPSI
 - Zone 1 Ex d e [ia] ia IIC T6 Gb
- ATEX, IECEx, CSA
 - Zone 21 Ex tD A21 IP67 T85 °C
- FM
 - XP IS Class I Div. 1 Groups A, B, C, D
 - DIP Class II+III Div. 1 Groups E, F, G

Others

- CMC/CPA (China)
- C-TICK (Australia and New Zealand EMC)
- EAC (Russia, Belarus, Kazakhstan)
- KCC (South Korea)

Cable entries

MAG 6000 I

MAG 6000 I Ex ATEX 2G D

Remote installation

2 x M25 (for supply/output) and 2 x M16 (for sensor connection) or 2 x ½" NPT (for supply/output) and 2 x M16 (for sensor connection)

2 x M20 (for supply/output) and 2 x M16 (for sensor connection)

Communication

Standard versions

HART, Modbus RTU/RS 485, FOUNDATION Fieldbus H1, DeviceNet, PROFIBUS PA, PROFIBUS DP add-on modules

Ex versions

HART, PROFIBUS PA,

1) Applicable for: Compact mounted MAG 6000 I Ex on MAG 3100 (sizes DN 15 ... DN 300 (½" ... 12"))

Selection and Ordering data

Article No.

SITRANS F M Transmitter MAG 6000 I

7ME6930-

Remote with standard wall mounting bracket, local display, die cast aluminum

2BA-1A

Click on the Article No. for the online configuration in the PIA Life Cycle Portal.

Supply voltage

Standard transmitter:
18 ... 90 V DC; 115 ... 230 V AC, 50 ... 60 Hz

Standard transmitter (NAMUR):
18 ... 30 V DC; 115 ... 230 V AC, 50 ... 60 Hz

Ex transmitter: 18 ... 30 V DC

Ex transmitter: 115 ... 230 V AC, 50 ... 60 Hz

Ex transmitter (NAMUR):
18 ... 30 V DC; 115 ... 230 V AC, 50 ... 60 Hz

2

3

4

5

6

Ex approval

Standard sensor: FM Class I, Div 2, CSA Class I, Div 2

0

Ex sensor: Hazardous area (ATEX 2G D; FM Class I, Zone 1; CSA Class I, Zone 1)

2

Communication

None

HART

PROFIBUS PA Profile 3

PROFIBUS DP Profile 3 (not for Ex version)

Modbus RTU/RS 485 (not for Ex version)

FOUNDATION Fieldbus H1

A
B
F
G
E
J

Cable gland entries

Metric
½" NPT0
2

Selection and Ordering data

Order code

Further design

Please add "-Z" to Article No. and specify Order code(s) and plain text.

Tag name plate, stainless steel (specify in plain text)

Y17

Tag name plate, plastic (self adhesive)

Y18

Special version (specify in plain text)

Y99

Operating instructions for SITRANS F M MAG 6000 I

Description

Article No.

• English

A5E02083319

• German

A5E02210835

All literature is available to download for free, in a range of languages, at www.siemens.com/processinstrumentation/documentation

Communication modules for MAG 6000 I
(All standard outputs can still be used)

Description	Article No.
HART (only for MAG 6000 I/Ex)	FDK:085U0321
Modbus RTU/RS 485 ¹⁾	FDK:085U0234
PROFIBUS PA Profile 3	FDK:085U0236
PROFIBUS DP Profile 3 ¹⁾	FDK:085U0237
DeviceNet ¹⁾	FDK:085U0229
FOUNDATION Fieldbus H1	A5E02054250

¹⁾ Not for Ex versions**Operating instructions for SITRANS F add-on modules**

Description	Article No.
HART, English	A5E03089708
PROFIBUS PA/DP	
• English	A5E00726137
• German	A5E01026429
Modbus	
• English	A5E00753974
• German	A5E03089262
FOUNDATION Fieldbus	
• English	A5E02318728
• German	A5E02488856
DeviceNet, English	A5E03089720

All literature is available to download for free, in a range of languages, at www.siemens.com/processinstrumentation/documentation

Accessories MAG 6000 I/MAG 6000 I Ex

Description	Article No.
Standard coil or electrode cable, 3 x 1.5 mm ² /18 gage, single shielded with PVC jacket, Temperature range: -30 ... +70 °C (-22 ... +158 °F)	
• 5 m (16.5 ft)	A5E02296523
• 10 m (33 ft)	FDK:083F0121
• 20 m (65 ft)	FDK:083F0210
• 30 m (98 ft)	A5E02297309
• 40 m (131 ft)	FDK:083F0211
• 50 m (164 ft)	A5E02297317
• 60 m (197 ft)	FDK:083F0212
• 100 m (328 ft)	FDK:083F0213
• 150 m (492 ft)	FDK:083F3052
• 200 m (656 ft)	FDK:083F3053
• 500 m (1640 ft)	FDK:083F3054
Special electrode cable (empty pipe detection or low conductivity), 3 x 0.25 mm ² , double shielded with PVC jacket, Temperature range: -30 ... +70 °C (-22 ... +158 °F)	
• 10 m (33 ft)	FDK:083F3020
• 20 m (65 ft)	FDK:083F3095
• 40 m (131 ft)	FDK:083F3094
• 60 m (197 ft)	FDK:083F3093
• 100 m (328 ft)	FDK:083F3092
• 150 m (492 ft)	FDK:083F3056
• 200 m (656 ft)	FDK:083F3057
• 500 m (1640 ft)	FDK:083F3058



Description	Article No.
Cable kit including standard coil cable (3 x 1.5 mm ² /18 gage, single shielded with PVC jacket) and special electrode cable (3 x 0.25 mm ² , double shielded with PVC jacket); Temperature range: -30 ... +70 °C (-22 ... +158 °F)	
• 5 m (16.5 ft)	A5E02296329
• 10 m (33 ft)	A5E01181647
• 15 m (49 ft)	A5E02296464
• 20 m (65 ft)	A5E01181656
• 25 m (82 ft)	A5E02296490
• 30 m (98 ft)	A5E02296494
• 40 m (131 ft)	A5E01181686
• 50 m (164 ft)	A5E02296498
• 60 m (197 ft)	A5E01181689
• 100 m (328 ft)	A5E01181691
• 150 m (492 ft)	A5E01181699
• 200 m (656 ft)	A5E01181703
• 500 m (1640 ft)	A5E01181705
Low noise electrode coax cable for low conductivity and high vibration levels, 3 x 0.13 mm ² ; Temperature range: -25 ... +85 °C (-13 ... +185 °F)	
• 2 m (6.6 ft)	A5E02272692
• 5 m (16.5 ft)	A5E02272723
• 10 m (33 ft)	A5E02272730

**Spare parts**




Description	Article No.
Display unit	FDK:085U3122
Accessory bag including cable gland inserts and connectors for sensor cables	FDK:085U3144
Display lid (Ex) in die-cast aluminum, with corrosion resistant coating (min. 60 µm).	7ME5933-0AC01
Blind lid for sensor cables connection compartment (only remote version) in die-cast aluminum, with corrosion resistant coating (min. 60 µm) incl. O-ring seal.	7ME5933-0AC02
Blind lid (mains supply, input/outputs) in die-cast aluminum, with corrosion resistant coating (min. 60 µm).	7ME5933-0AC03




Flow Measurement

SITRANS F M

Transmitter MAG 6000 I/6000 I Ex


Description	Article No.	
Safety clamp	7ME5933-0AC06	
Standard wall-mounting bracket, stainless steel AISI 316L/1.4404	7ME5933-0AC04	
Special wall-mounting bracket, BI 2.5 DIN59382 X6Cr17	7ME5933-0AC05	

Dimensional drawings

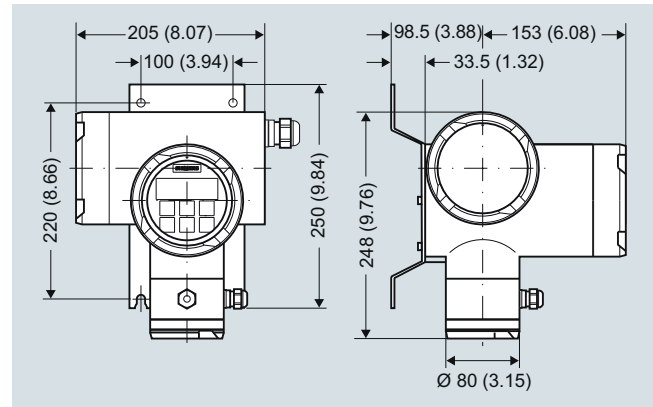

SITRANS F M transmitter MAG 6000 I with wall-mounting bracket, dimensions in mm (inch)

Complete spare part PCB unit

Description	Article No.	
MAG 6000 I std. (not for Ex) 18 ... 30 V DC; 115 ... 230 V AC Spare PCBA	FDK:085U3123	
MAG 6000 I std. (NAMUR), 18 ... 30 V DC; 115 ... 230 V AC Spare PCBA	A5E31426892	
MAG 6000 I Ex (NAMUR), 18 ... 30 V DC; 115 ... 230 V AC Spare PCBA for use with Ex sensors with increased safety e (For Ex sensors: 7ME6110, 7ME6120, 7ME6140, 7ME6310, 7ME6320, 7ME6340) (For 7ME6330 > DN300)	A5E31426877¹⁾	
MAG 6000 I Ex d 115 ... 230 V AC Spare PCBA for use with ATEX sensors with increased safety e	A5E01013127	
MAG 6000 I Ex d 18 ... 30 V DC Spare PCBA for use with ATEX sensors with increased safety e	A5E01013340	

¹⁾ Ex spare parts may only be exchanged by authorized personnel from Siemens.

Please use online Product selector to get latest updates.

Product selector link:

www.pia-portal.automation.siemens.com

Schematics

