

Overview

The pressure transmitter SITRANS P220 measures the gauge pressure of liquids, gases and vapors.

- Stainless steel measuring cell, fully welded
- Measuring ranges 2.5 to 1000 bar (36.3 to 14500 psi) relative
- For high-pressure applications and refrigeration technology division

Benefits

- High measuring accuracy
- Rugged stainless steel enclosure
- High overload withstand capability
- For aggressive and non-aggressive media
- For measuring the pressure of liquids, gases and vapors
- Compact design
- Gasket-less

Application

The pressure transmitter SITRANS P220 for gauge pressure is used in the following industrial areas:

- Mechanical engineering
- Shipbuilding
- Power engineering
- Chemical industry
- Water supply

Design**Device structure without explosion protection**


The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65), a M12 device plug (IP67), a cable (IP67) or a Quickon cable quick screw connection (IP67) connected electrically. The output signal is between 4 and 20 mA or 0 and 10 V.

Device structure with explosion protection

The pressure transmitter consists of a piezoresistive measuring cell with a diaphragm installed in a stainless steel enclosure. It can be used with a connector per EN 175301-803-A (IP65) or a M12 device plug (IP67) connected electrically. The output signal is between 4 and 20 mA.

Function

The pressure transmitter measures the gauge pressure of liquids and gases as well as the level of liquids.

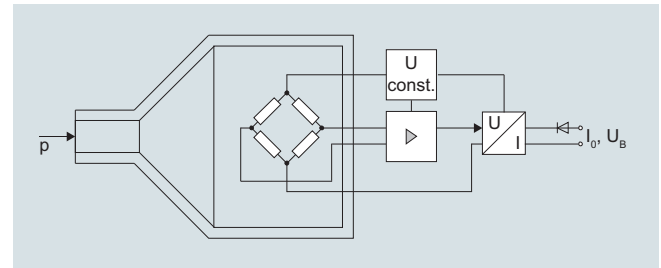Mode of operation

SITRANS P220 pressure transmitters (7MF1567-...), functional diagram

The stainless steel measuring cell has a thick-film resistance bridge to which the operating pressure p is transmitted through a stainless steel diaphragm.

The voltage output from the measuring cell is converted by an amplifier into an output current of 4 to 20 mA or an output voltage of 0 to 10 V DC.

The output current and voltage are linearly proportional to the input pressure.

Pressure Measurement

Single-range transmitters for general applications

SITRANS P220 for gauge pressure

1

Technical specifications

Application	Gauge pressure measurement	Liquids, gases and vapors
Mode of operation	Measuring principle	Piezoresistive measuring cell (stainless steel diaphragm)
Measured variable		Gauge pressure
Inputs	Measuring range	
	<ul style="list-style-type: none"> Gauge pressure - Metric - US measuring range 	2.5 ... 1000 bar (36 ... 14500 psi) 30... 14500 psi
Output	Current signal	4 ... 20 mA
	<ul style="list-style-type: none"> Load Auxiliary power U_B 	$(U_B - 10 V)/0.02 A$ DC 7 ... 33 V (10 ... 30 V for Ex)
	Voltage signal	0 ... 10 V DC
	<ul style="list-style-type: none"> Load Auxiliary power U_B Power consumption 	$\geq 10 k\Omega$ 12 ... 33 V DC $< 7 \text{ mA at } 10 k\Omega$
	Ratiometric output	0 ... 90 %
	<ul style="list-style-type: none"> Load Auxiliary power U_B Power consumption 	$\geq 10 k\Omega$ 5 V DC $\pm 10 \%$ $< 7 \text{ mA at } 10 k\Omega$
	Characteristic curve	Linear rising
Measuring accuracy	Error in measurement at limit setting incl. hysteresis and reproducibility	<ul style="list-style-type: none"> Typical: 0.25 % of measuring span Maximum: 0.5 % of measuring span
	Step response time T_{99}	$< 5 \text{ ms}$
	Long-term stability	
	<ul style="list-style-type: none"> Lower range value and measuring span 	0.25 % of measuring span/year
	Influence of ambient temperature	
	<ul style="list-style-type: none"> Lower range value and measuring span Influence of power supply 	0.25 %/10 K of measuring span 0.005 %/V
Conditions of use	<ul style="list-style-type: none"> Process temperature Ambient temperature Storage temperature Degree of protection (to EN 60529) 	-40 ... +120 °C (-40 ... +248 °F) -25 ... +85 °C (-13 ... +185 °F) -50 ... +100 °C (-58 ... +212 °F) <ul style="list-style-type: none"> IP 65 with connector per EN 175301-803-A IP 67 with M12 device plug IP 67 with cable IP 67 with cable quick screw connection
	Electromagnetic compatibility	<ul style="list-style-type: none"> acc. IEC 61326-1/-2/-3 acc. NAMUR NE21, only for ATEX versions and with a max. measuring deviation $\leq 1 \%$

Design	Weight	Approx. 0.090 kg (0.198 lb)
	Process connections	See dimension drawings
	Electrical connections	<ul style="list-style-type: none"> Connector per EN 175301-803-A Form A with cable inlet M16x1.5 or 1/2-14 NPT or Pg 11 M12 device plug 2 or 3-wire (0.5 mm²) cable ($\varnothing \pm 5.4 \text{ mm}$) Quickon cable quick screw connection
	Wetted parts materials	Stainless steel, mat.-No. 1.4016
	<ul style="list-style-type: none"> Measuring cell Process connection 	Stainless steel, mat. No. 1.4404 (SST 316 L)
	Non-wetted parts materials	Stainless steel, mat. No. 1.4404 (SST 316 L)
	<ul style="list-style-type: none"> Enclosure Rack cables 	Plastic PVC
Certificates and approvals	Classification according to pressure equipment directive (PED 2014/68/EU)	For gases of fluid group 1 and liquids of fluid group 1; complies with requirements of article 4, paragraph 3 (sound engineering practice)
	Lloyd's Register of Shipping (LR) ¹⁾	12/20010
	Germanischer Lloyd (GL) ¹⁾	GL19740 11 HH00
	American Bureau of Shipping (ABS) ¹⁾	ABS_11_HG 789392_PDA
	Bureau Veritas (BV) ¹⁾	BV 271007A0 BV
	Det Norske Veritas (DNV) ¹⁾	A 12553
	Drinking water approval (ACS) ¹⁾	ACS 15 ACC NY 360
	EAC ¹⁾	№ TC RU C-DE.ГБ05.B.00732 OC НАННО «ЦСВЭ»
	CRN ²⁾	0F18659.5C
	Underwriters Laboratories (UL) ¹⁾	UL 20110217 - E34453
	<ul style="list-style-type: none"> for USA and Canada worldwide 	IEC UL DK 21845
Explosion protection	Intrinsic safety "i" (only with current output)	Ex II 1/2 G Ex ia IIC T4 Ga/Gb Ex II 1/2 D Ex ia IIIC T125 °C Da/Db
	EC type-examination certificate	SEV 10 ATEX 0146
	Connection to certified intrinsically-safe resistive circuits with maximum values:	$U_i \leq 30 \text{ V DC}$; $I_i \leq 100 \text{ mA}$; $P_i \leq 0.75 \text{ W}$
	Effective internal inductance and capacity for versions with plugs per EN 175301-803-A and M12	$L_i = 0 \text{ nH}$; $C_i = 0 \text{ nF}$
	CSA ²⁾	70006348 Class I, Division I, Groups A, B, C and D; Class II, Division 1, Groups E, F and G, Class III Class I, Division 2, Groups A, B, C and D; Class II, Division 2, Groups F and G, Class III A/Ex ia IIC T4 Ga/Gb A/Ex ia IIIC T125°C Da/Db

¹⁾ For variants with output signal 0 ... 5 V and ratiometric output available soon.

²⁾ See ordering data for available versions.

Pressure Measurement

Single-range transmitters for general applications

SITRANS P220 for gauge pressure

1

Selection and ordering data

SITRANS P 220 pressure transmitters for gauge pressure, high-pressure and refrigeration applications, fully-welded version

Accuracy typ. 0.25 %

Wetted parts materials: stainless steel

Non-wetted parts materials: stainless steel

[Click on the Article No. for the online configuration in the PIA Life Cycle Portal.](#)

Article No.

Order code

[7MF1567](#) - - - - - A - - - - -

Measuring range

Overload limit

**Mini-
mum**
Max.

Burst pressure

For gauge pressure

0 ... 2.5 bar	(0 ... 36.3 psi)	-1 bar (-14.5 psi)	6.25 bar (90.7 psi)	25 bar (363 psi)	3 BD
0 ... 4 bar	(0 ... 58 psi)	-1 bar (-14.5 psi)	10 bar (145 psi)	40 bar (870 psi)	3 BE
0 ... 6 bar	(0 ... 87 psi)	-1 bar (-14.5 psi)	15 bar (217 psi)	60 bar (522 psi)	3 BG
0 ... 10 bar	(0 ... 145 psi)	-1 bar (-14.5 psi)	25 bar (362 psi)	60 bar (870 psi)	3 CA
0 ... 16 bar	(0 ... 232 psi)	-1 bar (-14.5 psi)	40 bar (580 psi)	96 bar (1392 psi)	3 CB
0 ... 25 bar	(0 ... 363 psi)	-1 bar (-14.5 psi)	62.5 bar (906 psi)	150 bar (2176 psi)	3 CD
0 ... 40 bar	(0 ... 580 psi)	-1 bar (-14.5 psi)	100 bar (1450 psi)	240 bar (3481 psi)	3 CE
0 ... 60 bar	(0 ... 870 psi)	-1 bar (-14.5 psi)	150 bar (2175 psi)	360 bar (5221 psi)	3 CG
0 ... 100 bar	(0 ... 1450 psi)	-1 bar (-14.5 psi)	250 bar (3625 psi)	600 bar (8702 psi)	3 DA
0 ... 160 bar	(0 ... 2320 psi)	-1 bar (-14.5 psi)	400 bar (5801 psi)	960 bar (13924 psi)	3 DB
0 ... 250 bar	(0 ... 3625 psi)	-1 bar (-14.5 psi)	625 bar (9064 psi)	1500 bar (21756 psi)	3 DD
0 ... 400 bar	(0 ... 5801 psi)	-1 bar (-14.5 psi)	1000 bar (14503 psi)	2400 bar (34809 psi)	3 DE
0 ... 600 bar	(0 ... 8702 psi)	-1 bar (-14.5 psi)	1500 bar (21755 psi)	3600 bar (52200 psi)	3 DG
0 ... 1000 bar	(0 ... 14500 psi)	-1 bar (-14.5 psi)	1500 bar (21755 psi)	5000 bar (72520 psi)	3 EA

Other version, add Order code and plain text:

Measuring range: ... up to ... bar (psi)

9 AA **H 1 Y**

Measuring ranges for gauge pressure

0 ... 30 psi	-14.5 psi	75 psi	360 psi	*	4 BE
0 ... 60 psi	-14.5 psi	150 psi	580 psi	*	4 BF
0 ... 100 psi	-14.5 psi	250 psi	580 psi	*	4 BG
0 ... 150 psi	-14.5 psi	375 psi	870 psi	*	4 CA
0 ... 200 psi	-14.5 psi	500 psi	1390 psi	*	4 CB
0 ... 300 psi	-14.5 psi	750 psi	2170 psi	*	4 CD
0 ... 500 psi	-14.5 psi	1250 psi	3480 psi	*	4 CE
0 ... 750 psi	-14.5 psi	1875 psi	5220 psi	*	4 CF
0 ... 1000 psi	-14.5 psi	2500 psi	5220 psi	*	4 CG
0 ... 1500 psi	-14.5 psi	3750 psi	8700 psi	*	4 DA
0 ... 2000 psi	-14.5 psi	5000 psi	13920 psi	*	4 DB
0 ... 3000 psi	-14.5 psi	7500 psi	21750 psi	*	4 DD
0 ... 5000 psi	-14.5 psi	12500 psi	34800 psi	*	4 DE
0 ... 6000 psi	-14.5 psi	15000 psi	34800 psi	*	4 DF
0 ... 8700 psi	-14.5 psi	21755 psi	52200 psi	*	4 DG
0 ... 14500 psi	-14.5 psi	21755 psi	72520 psi	*	4 EA

Other version, add Order code and plain text: Measuring range: ... up to ... psi

9 AA **H 1 Y**

Output signal

4 ... 20 mA; two-wire system; power supply 7 ... 33 V DC (10 ... 30 V DC for ATEX versions)

0 ... 10 V; three-wire system; power supply 12 ... 33 V DC

0 ... 5 V; 3-wire system; auxiliary power 7 ... 33 V DC

Ratiometric 10 ... 90 %; 3-wire system; auxiliary power 5 V DC ± 10 %

0
1 0
2 0
3 0

Explosion protection (only 4 ... 20 mA)

None

With explosion protection Ex ia IIC T4

0
1

Electrical connection

Connector per DIN EN 175301-803-A, stuffing box thread M16 (with coupling) *

M12 device plug per IEC 61076-2-101

Connection via fixed mounted cable, 2 m (not for type of protection "Intrinsic safety i")

Quickon cable quick screw connection PG9 (not for type of protection "Intrinsic safety i")

Connector per DIN EN 175301-803-A, stuffing box thread 1/2"-14 NPT (with coupling) *

Connector per DIN EN 175301-803-A, stuffing box thread PG11 (with coupling) *

Fixed mounted cable, length 5 m

Special version

1
2
0 3
0 4
5
6
0 7
9
N 1 Y
* Order code E21 required for complete configuration with CRN and $cCSA_{US}$ Ex approval.

Pressure Measurement

Single-range transmitters for general applications

SITRANS P220 for gauge pressure

1

Selection and ordering data

SITRANS P 220 pressure transmitters for gauge pressure, high-pressure and refrigeration applications, fully-welded version

Accuracy typ. 0.25 %

Wetted parts materials: stainless steel

Non-wetted parts materials: stainless steel

Process connection

G½" male per EN 837-1 (½" BSP male) (standard for metric pressure ranges mbar, bar)

G½" male thread and G1/8" female thread

G¼" male per EN 837-1 (¼" BSP male)

7/16"-20 UNF male

¼"-18 NPT male (standard for pressure ranges in H₂O and psi) *

¼"-18 NPT female (Only for measuring ranges ≤ 60 bar (870 psi))

½"-14 NPT male

½"-14 NPT female (Only for measuring ranges ≤ 60 bar (870 psi))

7/16"-20 UNF female

M20x1.5 male

G1/4" to DIN 3852 Form E

G1/2" to DIN 3852 Form E

Special version

Version

Standard version *

Further designs

Supplement the Article No. with "-Z" and add Order code.

Quality Inspection Certificate (5-point characteristic curve test) according to IEC 60770-2 (not possible for measuring ranges > 0 ... 600 bar/0 ... 8 702 psi)

Oxygen version, free of oil and degreased (not in conjunction with explosion protection version)


With CRN and cCSA_{US} Ex approval (only for measuring ranges 0 ... 30 psi bis 0 ... 8 700 psi)* Order code E21 required for complete configuration with CRN and cCSA_{US} Ex approval..

Article No.


Order code

Article No.	Order code
7MF1567 - - - - -	A - - - - -
	A
	B
	C
	D
	E
	F
	G
	H
	J
	P
	Q
	R
	Z
	P1Y
	1
	C11
	E10
	E21

Dimensional drawings

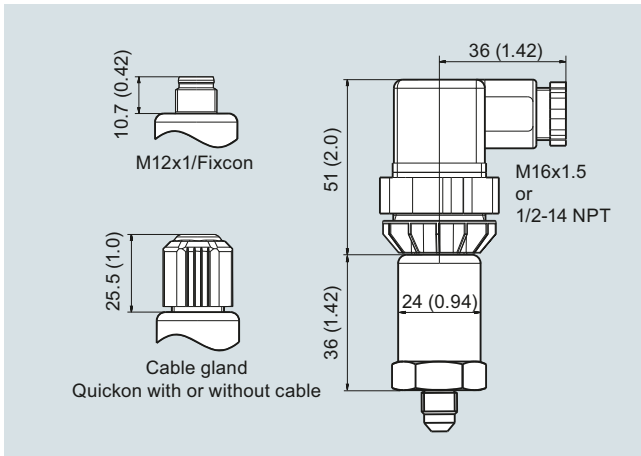

SITRANS P220, electrical connections, dimensions in mm (inch)

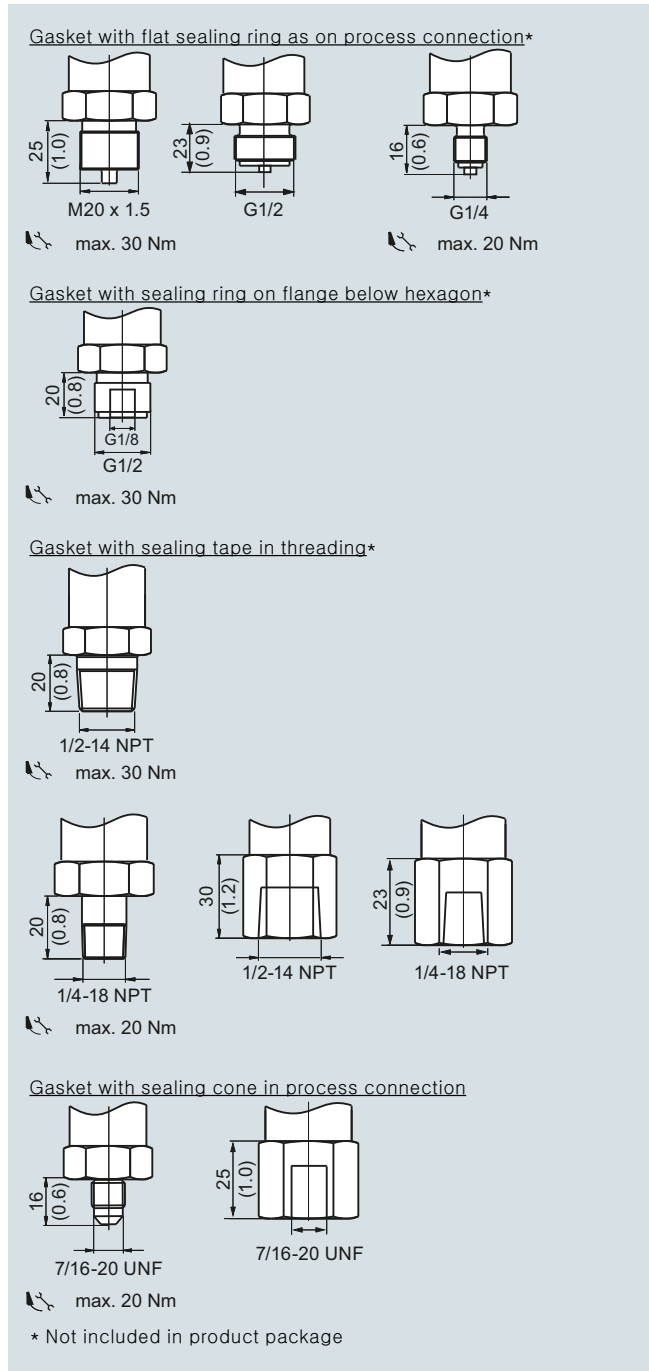


SITRANS P220, process connections, dimensions in mm (inch)

Pressure Measurement


Single-range transmitters for general applications

SITRANS P220 for gauge pressure


Schematics

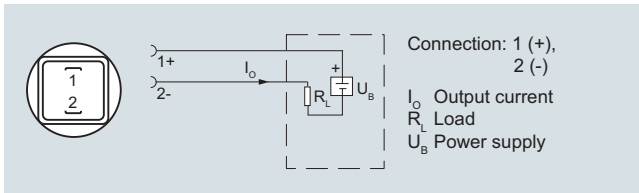


Connection with current output and connector per EN 175301

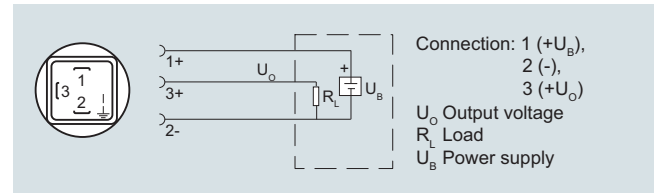


Connection with voltage output, ratiometric output and plug according to EN 175301

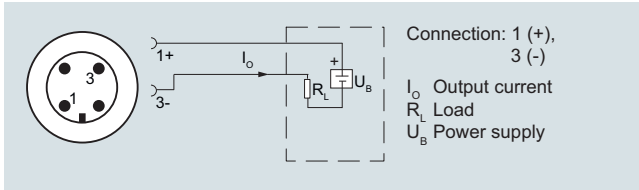


Connection with current output and M12x1 device plug

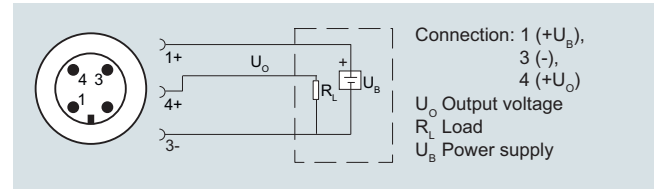


Connection with voltage output, ratiometric output and M12x1 device plug

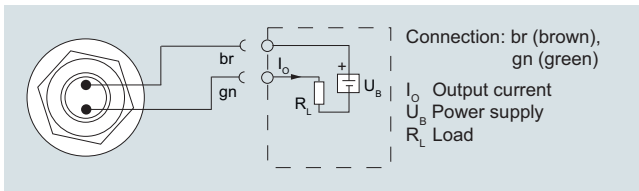


Connection with current output and cable

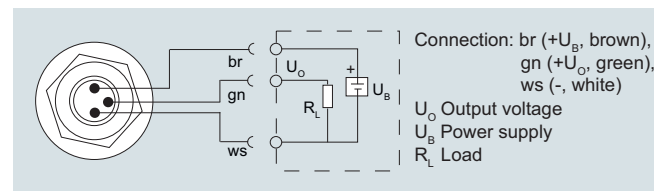

Connection with voltage output, ratiometric output and cable

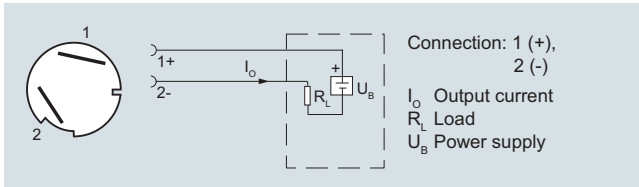


Connection with current output and cable quick screw connection Quick-on

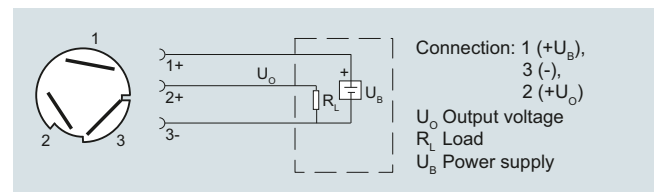


Connection with voltage output, ratiometric output and Quickon fast cable termination

Version with explosion protection: 4 ... 20 mA

The grounding connection is conductively bonded to the transmitter enclosure

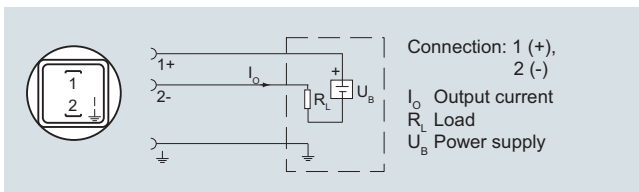

Connection with current output and connector per EN 175301 (Ex)

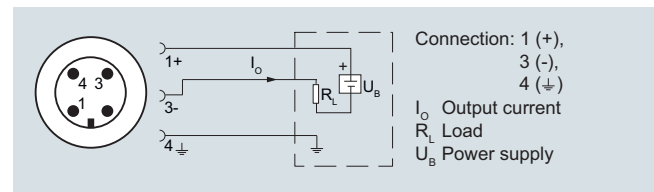

Connection with current output and M12x1 device plug (Ex)